




Your Partner In Fiber And Cable

Broad Band Low-Peak Water

[www.chinaztt.com](http://www.chinaztt.com)

Meticulous working  
Value-added service  
Continual improvement

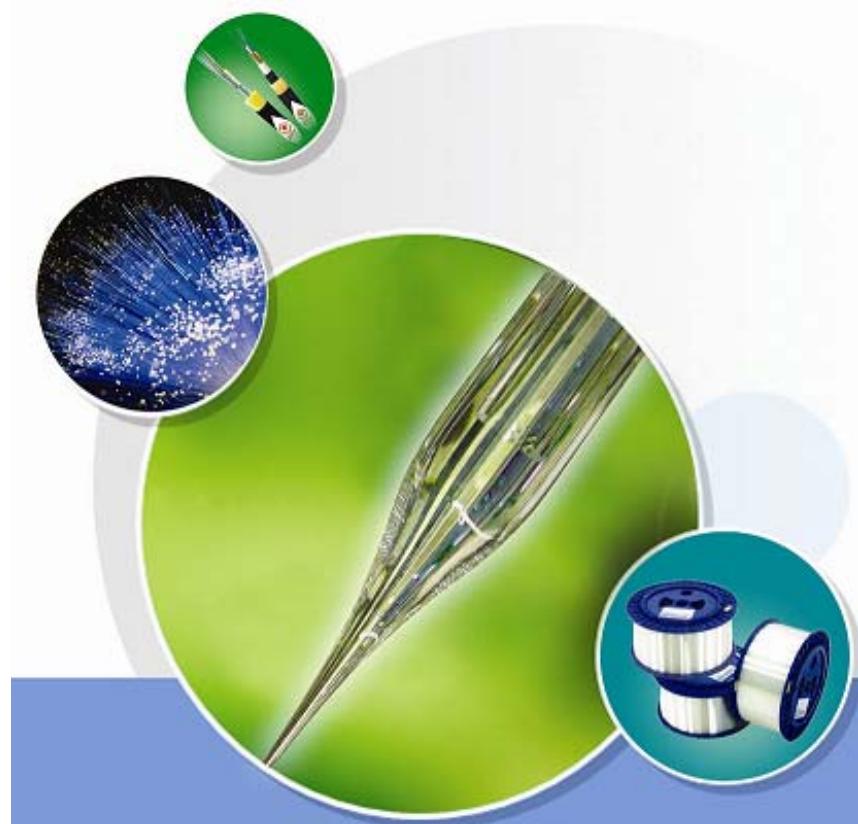


## ZHONGTIAN TECHNOLOGY FIBER OPTICS


## TECHNOLOGY SUPERIORITY

### ● GOOD VALUE OF PMD


ZFOC use special spun device successfully controlled the value of PMD, and make sure that it keeps stable in cabling.

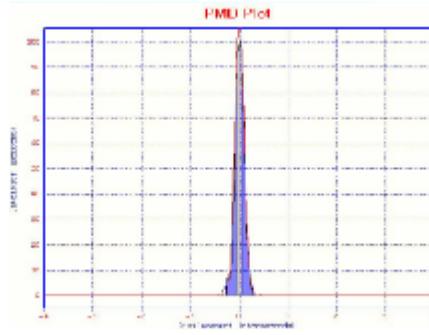

Interference pattern of spun fiber PMD measurement

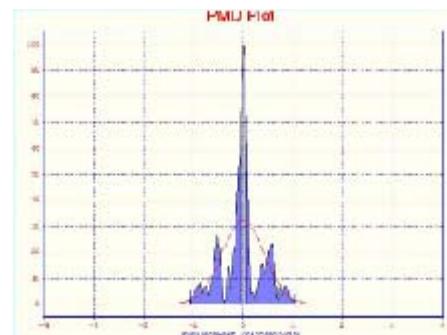

Interference pattern of unspun fiber PMD measurement

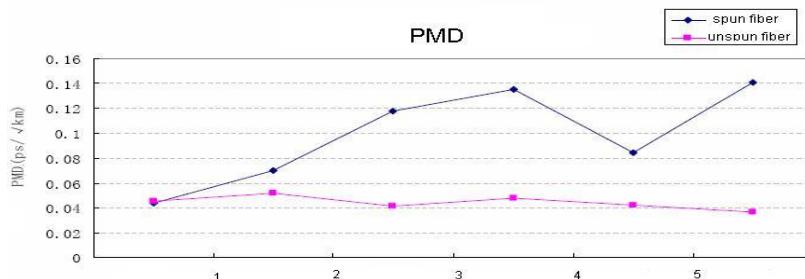

In cabling, the capability of spun fiber is more stable than unspun fiber, and the value of PMD is smaller.

### ● PERFECT CONNECTION CAPABILITY

Approved by optical communication products ministry of quality supervision and inspection center, the connection between ZFOC fiber in and outside is good. The single-end connect-loss won't be over 0.1 dB and the double-end connect-loss is all little than 0.05dB.

### ● SUPER-STRENGTH SUPER-LONG-DISTANCE FIBER

Apply to non-relay communication network.

Features: proof test >2%

Standard length of drum: 100km , and longer than this if necessary.

## LOW-PEAK WATER SINGLE MODE FIBER SPECIFICATIONS

Category	Description	Specifications	
		Before cabling	After cabling
Optical Specifications	Attenuation @1310 nm	≤0.34 dB/km (max.)	≤0.36 dB/km (max.)
		≤0.33 dB/km(average)	≤0.35 dB/km(average.)
	Attenuation @1383±3 nm	≤0.32 dB/km(max.)	≤0.35 dB/km(max.)
	Attenuation @1550 nm	≤0.20 dB/km (max.)	≤0.22dB/km (max.)
		≤0.19 dB/km(average)	≤0.21 dB/km(average.)
	Attenuation @1625 nm	≤0.23dB/km	≤0.25 dB/km
	Zero Dispersion Wavelength	1300~1324 nm	
	Zero Dispersion Slope	≤ 0.092 ps/nm <sup>2</sup> ·km	
	PMD Link value (M=20cables Q=0.01% ) maximum PMD <sub>Q</sub>	0.1 ps/v/km	
	Cable Cutoff Wavelength ( $\lambda_{cc}$ )	≤1260 nm	
Dimensional Specifications	Macro bending Loss (100 turns; Φ50 mm) @1550 nm (100 turns; Φ50 mm) @1625 nm	≤ 0.05 dB ≤ 0.10 dB	
	Mode Field Diameter @1310 nm	9.2±0.4μm	
	Cladding Diameter	125 ±0.7μm	
Mechanical Specifications	Core/clad concentricity error	≤0.5μm	
	Cladding Non-Circularity	≤1.0%	
Mechanical Specifications	Proof stress	≥0.69Gpa	

**Zhongtian Technology Fiber Optics Co.,Ltd.**

**Shanghai Office(Headquarters)**

Add:26F, Baoding Building,No.550,Xujiahui  
Road,Shanghai,P.R.China  
Tel:86-21-64739988  
Fax: 86-21-64158399

**Beijing Office**

Add:719#Room,Tongtai Building,No.33,Financial  
Street,Beijing ,P.R.China  
Tel:86-10-88088203  
Fax:86-10-88088203

**Nantong Factory**

Add:6# Zhongtian Road, Nantong Economic&  
Technological Development Zone  
Nantong,Jiangsu,P.R.China  
Tel:86-513-83599671  
Fax: 86-513-83599670